



MR-2915 LED Driver

Used with the MR-2944 and MR-2614 Remote Annunciators, the MR-2915 LED Driver drives up to 24 LEDs. There is a 50 pin connector for connection to a wire-wrap socket. The LEDs would be connected to the wire-wrap legs of the socket.

Wiring Diagram

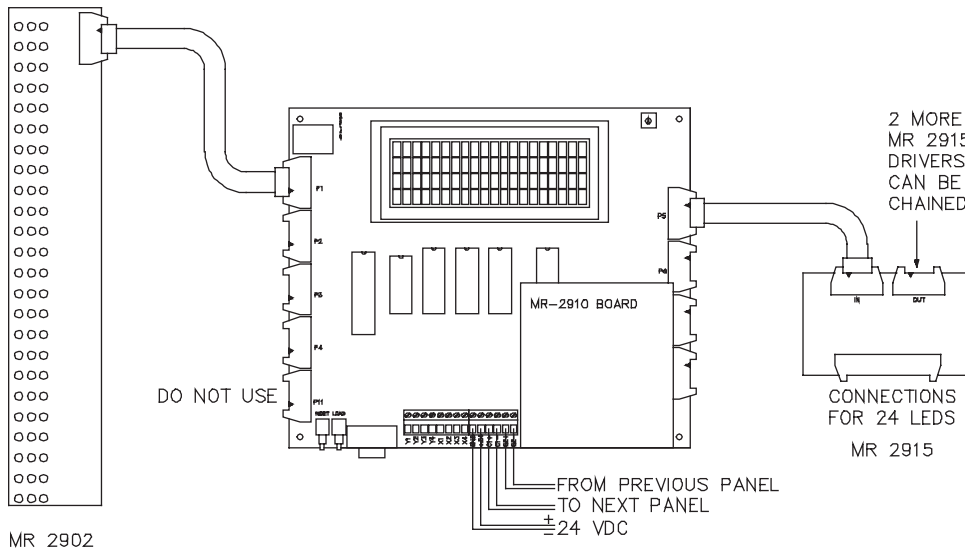

LED Pinouts

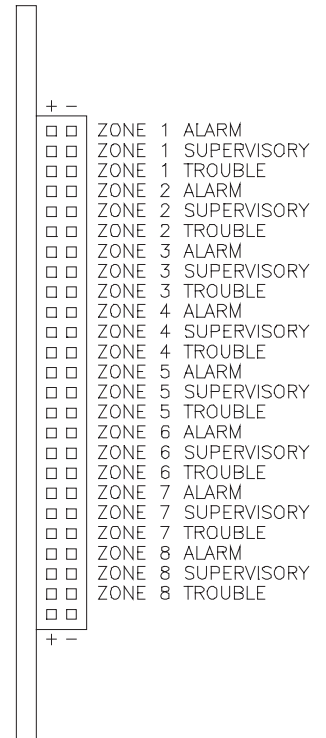

Specifications

Voltage: 5 VDC
Max LED Current: 10 mA
Max Total Current: 250 mA

Canada
 25 Interchange Way
 Vaughan, ON L4K 5W3
 Tel: (888) SECUTRON
 (888) 732-8876
 Fax: (905) 660-4113

U.S.A
 60 Industrial Parkway, PMB 278
 Cheektowaga, New York 14227
 Tel: (888) SECUTRON
 (888) 732-8876
 Fax: (905) 660-4113



www.secutron.com

LT-2058 Rev. 0